LeanDrum CF (Cold Forming)

- Wash, Rinse and Blow-off in a small package
- Full immersion cleaning
- Design for cold forming applications
- Stainless Steel Drum, Tanks & Housings
- Easy drum access (no crane required)
- Low cost maintenance
- Easy maintenance design
- No pumps or nozzles'
- Visible process windows
- Support rollers out of solution
- Perforated Shell
- Longer bath life
- 3-2-1 Warranty

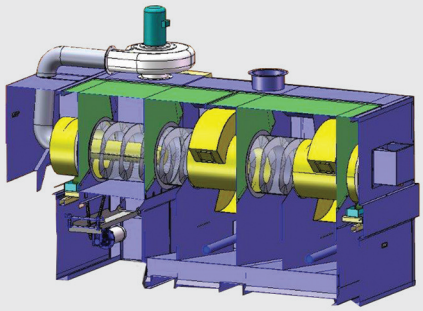

LeanDrum CF

All specifications are subject to change without notice

CLEANING TECHNOLOGIES GROUP
RANSOHOFF • BLACKSTONE-NEY ULTRASONICS • CTG ASIA

MODEL NUMBER	LD-CF	
PART PRODUCTION	12 CU FT/Hour @ 2PRM design drum speed vs Drive 1 - 3 RPM	
WASH CAPACITY	120 Gallons (455 Liters)	
RINSE CAPACITY	120 Gallons (455 Liters)	
BLOWER CAPACITY	875 CFM @ 6" SP	
DRUM DIAMETER	18" (460mm)	
FLOOR SPACE (LXWXH)	11' X 5' 3" X 5' 3" (3353 mm X 1600mm X 1600mm)	
UTILITY REQUIRMENTS	460V 3 Ph, 60 Hz	
TEMPERATURE CAPABLE	140° F - 200° F	

Ransohoff
(800) 248-9274
4933 Provident Drive
Cincinnati, OH 45246
www.ctgclean.com

Blackstone-NEY Ultrasonics
(800) 766-6606
P.O. Box 220
9 N. Main St.
Jamestown, NY 14702-0220

CTG Asia
(86)0512-66161698
56 Songshan Road
Suzhou New District
Jiangsu Province, China PRC: 215151